Keyless Chucks, QC fitting




Description

Keyless chucks are available as the upper and/or lower fixing. The upper keyless chuck (with square drive fitting) can only be used with the 6 N.m and 10 N.m sensors.

Specifications

Part No.	Type	Fitting	Sample Min./Max. Ø		Height	
432-444	Upper Keyless Chuck	3/8" square	23 mm / 35 mm	0.91" / 1.38"	75 mm	2.95"
432-445	Lower Keyless Chuck	—	37.5 mm / 70 mm	1.48" / 2.76"	107 mm	4.21"
432-496	Lower Keyless Chuck	—	23 mm /35 mm	0.91" / 1.38"	103 mm	4.05"

Dimensions mm (inch)

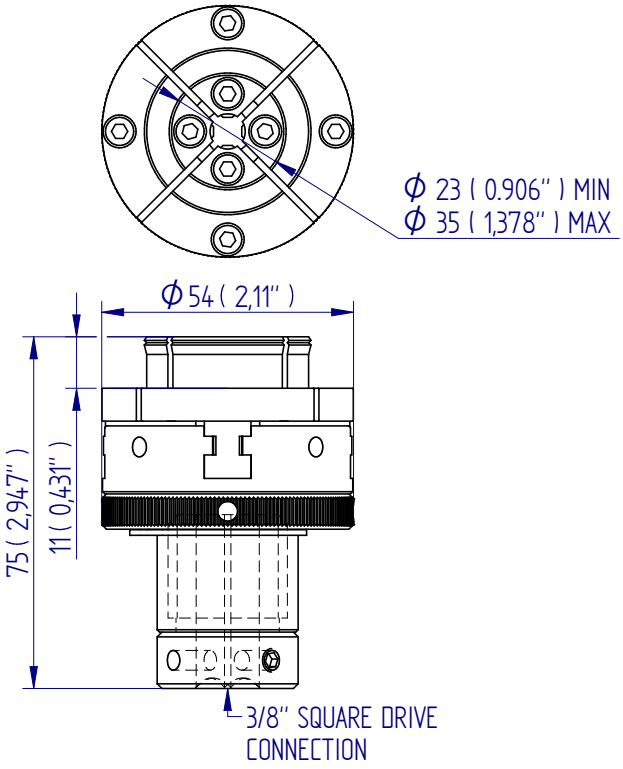

DISTRIBUTOR STAMP

DS-1130-01

FS 58553

Mecmesin reserves the right to alter equipment specifications without prior notice. E&OE

Head Office
Mecmesin Limited
w: www.mecmesin.com
e: sales@mecmesin.com

France
Mecmesin France
w: www.mecmesin.fr
e: contact@mecmesin.fr

Germany
Mecmesin GmbH
w: www.mecmesin.de
e: info@mecmesin.de

North America
Mecmesin Corporation
w: www.mecmesincorp.com
e: info@mecmesincorp.com

Asia
Mecmesin Asia Co., Ltd
w: www.mecmesinasia.com
e: sales@mecmesinasia.com

China
Mecmesin (Shanghai) Pte Ltd
w: www.mecmesin.cn
e: sales@mecmesin.cn